



DRAWER SYSTEMS

www.eurofitsystems.com

FURNITURE FITTINGS & COMPONENTS

ABOUT US

OUR MISSION

To be the UK's most trusted partner for quality furniture components.

WHO WE ARE


Since 2000, Eurofit Systems has helped UK furniture manufacturers build with confidence.

From our base in Beverley, East Yorkshire, we supply quality fittings and components to medium and large OEMs and distributors nationwide, backed by the expert support and dependable supply chain that we believe long-term partnerships are built on.

As direct importers, we control our supply chain from source to shelf, giving our customers sharper pricing, consistent quality and the stock availability their production schedules demand.

Our range covers the full breadth of furniture hardware, from hinges, runners and handles to fixings, fasteners and connectors.

Everything needed to build, assemble and finish, all from one trusted partner.

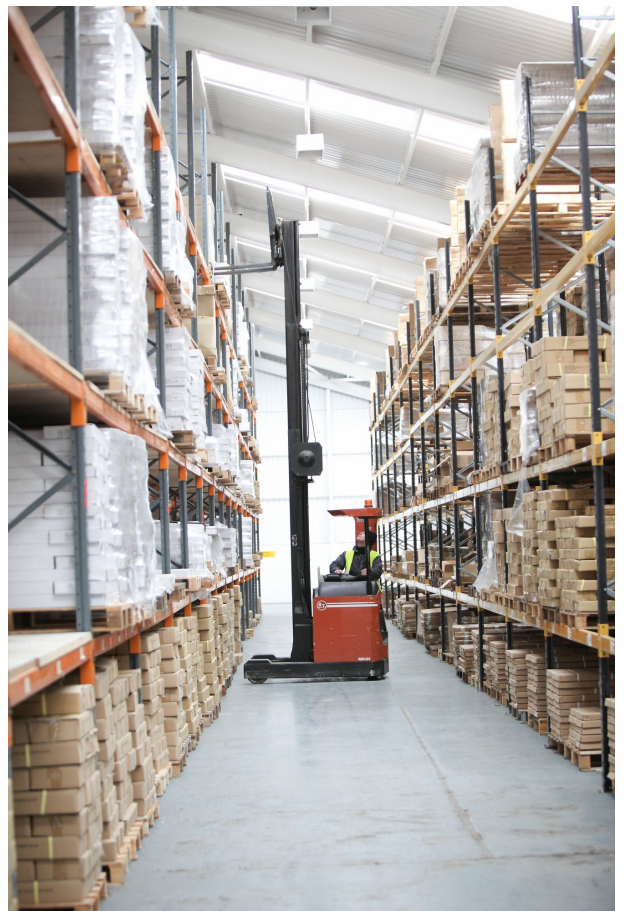

60,000 sq ft

WAREHOUSE

BEVERLEY, EAST YORKSHIRE

3,000+

SKUS

IN STOCK AND READY TO SHIP

4,500

PALLET LOCATIONS

CAPACITY TO SCALE WITH DEMAND

Drawer Systems Index

2.DS1	Series DS1 Series DS1 Clamp On Runner 2.DS1.01
2.DS7	Series DS7 Series DS7 Standard Runner 2.DS7.01
2.DS35	Series DS35 Series DS35 Standard Runner 2.DS35.01
2.DS46	Series DS46 Series DS46 Standard Runner 2.DS46.01 Series DS46 Soft Close Runner 2.DS46.02 Series DS46 Push To Open Soft Close Runner 2.DS46.03
2.DS53	Series DS53 Series DS53 Standard Runner 2.DS53.01
2.DS76	Series DS76 Series DS76 Standard Runner 2.DS76.01 Series DS76 Locking Runner 2.DS76.02 Series DS76 Mounting Bracket 2.DS76.03
2.DS80	Series DS80 Series DS80 Standard Runner 2.DS80.01
2.DS86	Series DS86 Series DS86 Standard Runner 2.DS86.01

Series DS1 Clamp On Runners

CLAMP ON BOTTOM FIX ROLLER RUNNERS

Available Finish
●
Black



The **DS1** is designed for speed and ease of assembly, the drawer members are clamped on to the drawer sides using a choice of pneumatic clamping machines that can be purchased or supplied on loan. The cabinet runners are either screwed on or knocked in via 10mm cam adjustable dowels, offering +/-1.5mm vertical adjustment. Hand held and bench clamping machines available from stock.

Built from robust steel, each pair handles loads of up to 25kg and works with panels between 12 and 12.5 mm thick.

For an even more refined feel, a soft-close attachment can be added separately (sold as an optional extra).

Eurofit Systems stock the below options. More lengths, fixing methods and finishes available subject to initial lead times and moq's.

Divan Bed Drawers	Bedroom Furniture	Occasional Furniture
Built In Furniture	Office Furniture	Wooden Drawer Wraps

KEY FEATURES

✓ Clamp on drawer runners

✓ Fast and accurate assembly

✓ Lengths available 250mm - 600mm



✓ Extension 75%

✓ Load rating 25kg

✓ Epoxy coated cold rolled steel

✓ Drawer wall thickness 11mm - 14mm

✓ Vertical cam adjustable dowels on cabinet runners

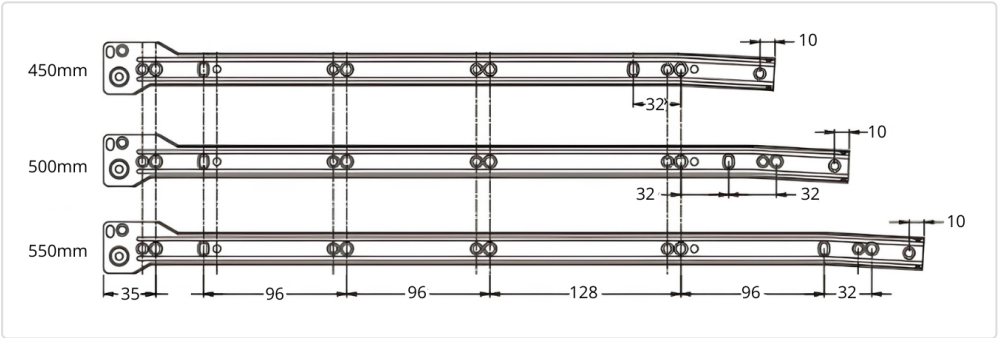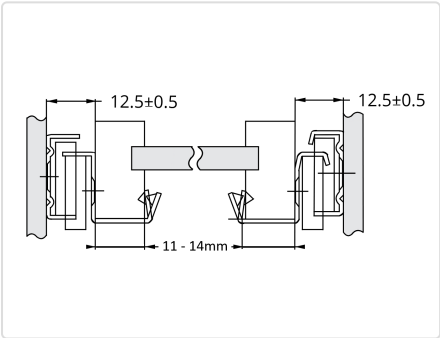

DRAWER MEMBER DETAILS (All measurements in mm)

Drawer Runner Member	450mm	500mm	550mm	Box Qty
Right Runner	DS24501	DS25004	DS25503	100
Right Runner With Locking Tab	—	DS25005	DS25504	100
Left Runner	DS44503	DS45004	DS45503	100

CABINET MEMBER DETAILS (All measurements in mm)

Cabinet Runner Member (Front Dowel Position (mm))	450mm	500mm	550mm	Box Qty
Right Side Adjustable Dowel (35)	—	DS15005	DS15503	100
Right Side Non Adjustable Dowel (35)	—	DS15005SD	—	100
Right Side Non Adjustable Dowel (67)	—	DS15007	—	100
Right Side For Screw Fix	DS14510	—	DS15505	100
Left Side Adjustable Dowel (35)	—	DS35005	DS35504	100
Left Side Non Adjustable Dowel (35)	—	DS35005SD	—	100
Left Side Non Adjustable Dowel (67)	—	DS35007	—	100
Left Side For Screw Fix	DS34510	—	DS35506	100

TECHNICAL DATA

• DS15005, DS15005SD, DS15503, DS35005, DS35005SD, DS35504 front dowel positioned 35mm in from cabinet front

• DS15007 and DS35007 front dowel positioned 67mm in from cabinet front

ORDERING GUIDE

• Bulk pack - 100 pieces per box

• Order DS1,DS2,DS3 and DS4 to make a set

• Order in multiples of 100

• Clamp runners can only be fitted with pneumatic machines

FURTHER INFORMATION

• Technical drawings available up on request

• Contact the sales team for information on more lengths and finishes available

• Enquire about clamping machine terms

Series DS7 Drawer System

SINGLE WALL METAL DRAWER SYSTEM

Available Finish

White



Single wall metal drawer system ideal for economical furniture applications. Single extension drawer using rollers for a smooth action with self closing feature that can be used together with a soft close mechanism.

Back & base panel width = internal cabinet width - 31mm

Cold rolled steel material with a load bearing capacity of 25kg

Most commonly used sizes are stock in bulk pack to allow for components to be distributed to the required assembly area withing the factory. Stocked in white, but many more colours available subject to moq's and initial lead times

KITCHEN CABINETS

BEDROOM FURNITURE

CONTRACT FURNITURE



OFFICE FURNITURE

BATHROOM FURNITURE

SHOP FITTING

KEY FEATURES

- ✓ Single extension
- ✓ Self closing
- ✓ Double stop safety feature
- ✓ 2 dimension adjustment front bracket
- ✓ Easy and quick to assemble
- ✓ Soft close mechanism available

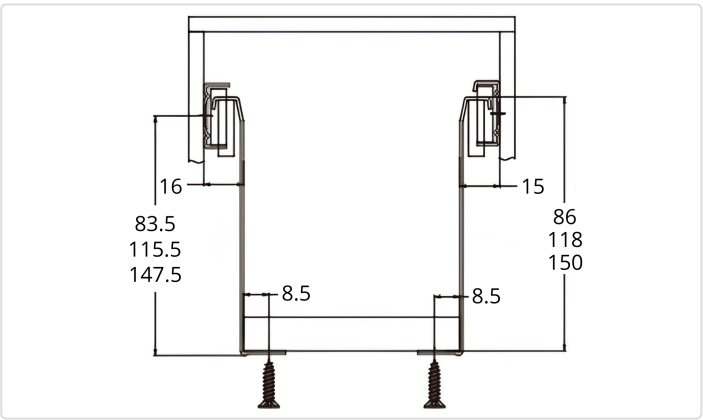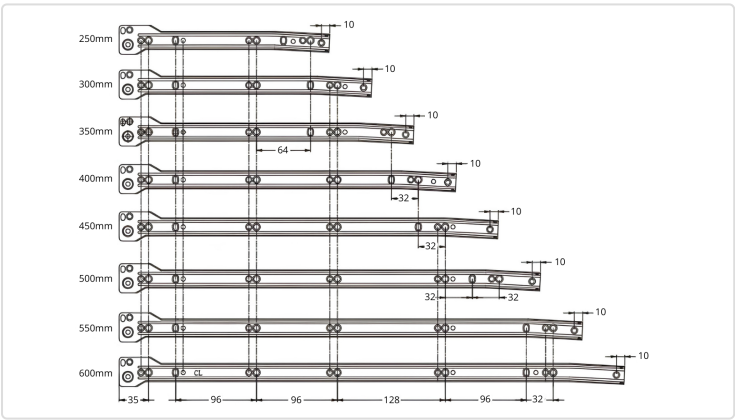

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Height / Length	270	350	400	450	Box
H85mm	DS708527WH	DS708535WH	DS708540WH	DS708545WH	10
H118mm	DS711827WHB	DS711835WHB	DS711840WHB	—	Bulk
H150mm	DS715027WHB	DS715035WHB	DS715040WHB	DS73451	Bulk

TECHNICAL DATA

- 25kg load rating
- Base & Back width = Internal Cabinet width - 31mm
- Can be used with any panel thickness

ORDERING GUIDE

- Drawer members boxed in 100's
- Cabinet members boxed in 20's
- Order in multiples of 100 sets for bulk pack

FURTHER INFORMATION

- DS90012 + DS90013 soft close mechanism and activator for metal drawers - 1 required per drawer set

Series DS35

MEDIUM DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated



The IntAfit Series 35 is a compact, medium-duty full-extension ball bearing drawer runner designed for everyday furniture and cabinetry applications. Featuring a 3-part slide mechanism with 100% extension, the Series 35 provides complete drawer access in a slim 35mm profile. Cold-rolled steel construction with bright zinc plating delivers reliable corrosion resistance and smooth operation. With a 35kg load rating and just 12.6mm width, the Series 35 is ideal for kitchen, bedroom, bathroom and office furniture where space efficiency and dependable performance are essential.

Kitchen Drawer Cabinets

Bedroom & Wardrobe Furniture

Bathroom Vanity Units



Office Desk Pedestals

General Furniture & Cabinetry

Retail Display Units

KEY FEATURES

- ✓ 100% full extension for complete drawer access
- ✓ Medium duty 35kg load rating at 450mm length
- ✓ 3-part slide mechanism for smooth operation
- ✓ Compact 35mm profile height minimises clearance
- ✓ Slim 12.6mm width maximises drawer space
- ✓ Bright zinc plated for corrosion resistance 48 hour salt spray test
- ✓ Quick release drawer member
- ✓ Stock lengths 400mm and 450mm lengths - enquire for more lengths

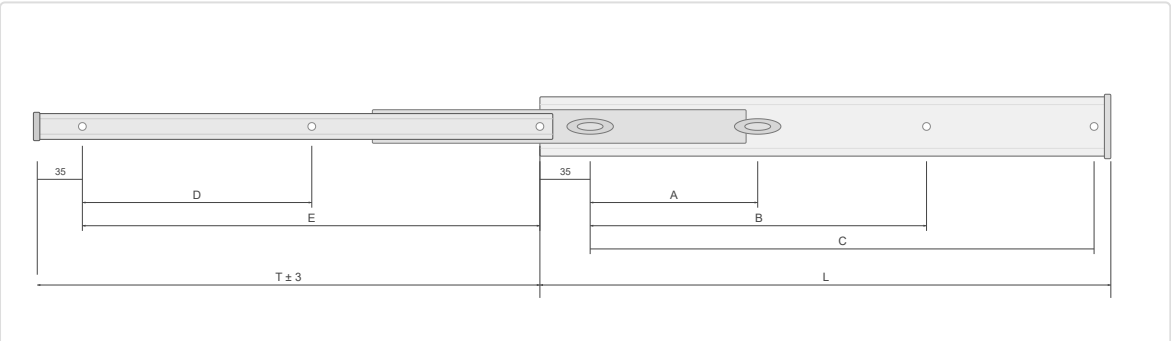

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Member	Code	Length	Travel	1st(D)	1st(C)	A	B	C	D	E	Box Qty
Cabinet	DS54022	400	400	35	—	128	96	96	—	—	20
Drawer	DS54521	400	400	—	36	—	—	—	128	192	100
Cabinet	DS54522	450	450	35	—	128	96	128	—	—	20
Drawer	DS54523	450	450	—	36	—	—	—	160	192	100

TECHNICAL DATA

- Load rating 35kg based on 450mm length. All dimensions in mm.
- Profile: 35 x 12.6mm cold-rolled steel.
- Side mount only

ORDERING GUIDE

- Runners sold in pairs (2)
- One pair per drawer
- Drawer width = 26mm +/- 2mm

FURTHER INFORMATION

- Full technical datasheet available on request, fixing details, and installation instructions

Series DS46 Standard Close

MEDIUM DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated



The IntAfit Series 46 is a medium-duty, full-extension ball bearing drawer runner designed for general-purpose furniture and cabinetry applications. Featuring a 3-part slide mechanism with 100% extension, the Series 46 provides complete drawer access across 10 lengths from 250mm to 750mm. Cold-rolled steel construction with bright zinc plating delivers excellent corrosion resistance and long service life. With a 45kg load rating and a compact 12.7mm profile width, this runner maximises internal drawer space while maintaining reliable performance for kitchen, bedroom, and office furniture.

** Load rating based on 450mm length. Runners sold in pairs. Drawer width = internal cabinet width - 25.4mm +/- 2mm.*

Kitchen & Bedroom Furniture

Office Furniture & Desking

Retail Display Units



Domestic Cabinetry

Bathroom Vanity Units

Workshop Storage

KEY FEATURES

- ✓ 100% full extension for complete drawer access
- ✓ Medium duty 45kg load rating at 450mm length
- ✓ 3-part slide mechanism for smooth operation
- ✓ Available in 10 lengths from 250mm to 750mm
- ✓ Bright zinc plated for corrosion resistance
- ✓ Quick release drawer member
- ✓ Low 46mm profile height minimises drawer clearance
- ✓ Compact 12.7mm width maximises internal drawer space

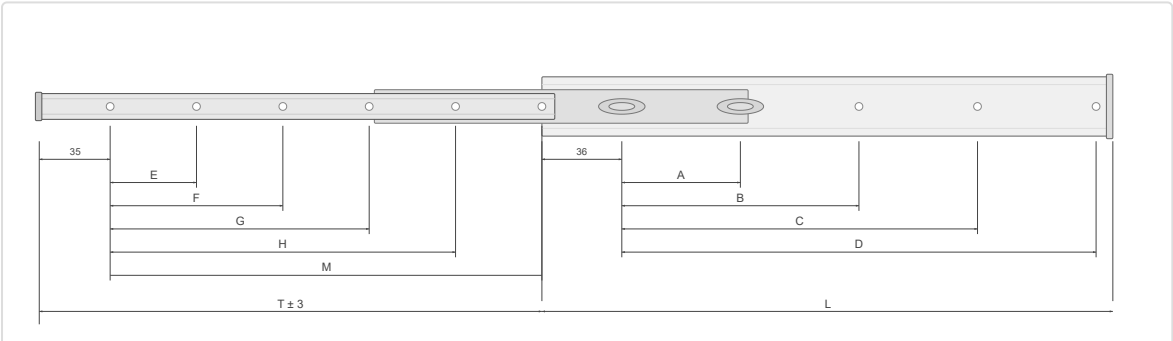

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Member	Code	Length	Travel	1st(D)	1st(C)	A	B	C	D	E	F	G	H	M	Box
Set	DS52500	250	254	35	36	128	—	—	—	229	192	—	—	—	10
Set	DS53000	300	305	35	36	128	96	—	—	279	128	114	—	—	10
Set	DS53502	350	356	35	36	128	96	—	—	329	128	164	—	—	10
Cabinet	DS54022	400	406	—	36	128	96	96	—	—	—	—	—	—	20
Drawer	DS54023	400	406	35	—	—	—	—	—	379	128	192	—	—	100
Cabinet	DS54520	450	457	—	36	128	96	128	—	—	—	—	—	—	20
Drawer	DS54521	450	457	35	—	—	—	—	—	429	128	192	72	—	100
Set	DS55003	500	508	35	36	128	96	192	—	479	128	64	160	90	10
Cabinet	DS55520	550	559	—	36	128	96	128	96	—	—	—	—	—	20
Drawer	DS55521	550	559	35	—	—	—	—	—	529	128	96	192	76	100

TECHNICAL DATA

- Load rating 45kg based on 450mm length — ratings decrease with runner length.
- All dimensions in mm.
- First hole for cabinet member 37mm from front edge

ORDERING GUIDE

- Runners sold in pairs (2)
- One pair per drawer
- Drawer width = internal cabinet width - 26mm +/- 2mm

FURTHER INFORMATION

- Full technical datasheet available on request including load curves, fixing details, and installation instructions.

Series DS46 Standard Close

MEDIUM DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated

PRODUCT CODES & SPECIFICATIONS (continued)

Member	Code	Length	Travel	1st(D)	1st(C)	A	B	C	D	E	F	G	H	M	Box
Set	DS56001	600	610	35	36	128	96	128	192	579	128	96	192	126	10
Set	DS57006	700	711	35	36	128	96	128	192	679	128	96	224	194	10
Set	DS57500	750	761	35	36	128	96	192	192	729	128	96	288	180	10

TECHNICAL DATA

- Load rating 45kg based on 450mm length — ratings decrease with runner length.
- All dimensions in mm.
- First hole for cabinet member 37mm from front edge

ORDERING GUIDE

- Runners sold in pairs (2)
- One pair per drawer
- Drawer width = internal cabinet width - 26mm +/- 2mm

FURTHER INFORMATION

- Full technical datasheet available on request including load curves, fixing details, and installation instructions.

Series DS46 Soft Close

MEDIUM DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated



The IntAfit Series 46 Soft Close delivers whisper-quiet, controlled closure on every use — perfect for bedrooms, and offices where smooth, silent operation matters.. Featuring a 3-part slide mechanism with 100% extension. Cold-rolled steel construction with bright zinc plating delivers excellent corrosion resistance and long service life. With a 45kg load rating and a compact 12.7mm profile width, this runner maximises internal drawer space while maintaining reliable performance for kitchen, bedroom, and office furniture.

Bedroom Furniture

Office Furniture & Desking

Retail Display Units



Domestic Cabinetry

Cashier Drawers

Workshop Storage

KEY FEATURES

- ✓ 100% full extension for complete drawer access
- ✓ Medium duty 45kg load rating at 450mm length
- ✓ 3-part slide mechanism for smooth operation
- ✓ Available in 5 lengths from 350mm to 550mm
- ✓ Bright zinc plated for corrosion resistance
- ✓ Quick release drawer member
- ✓ Low 46mm profile height minimises drawer clearance
- ✓ Compact 12.7mm width maximises internal drawer space

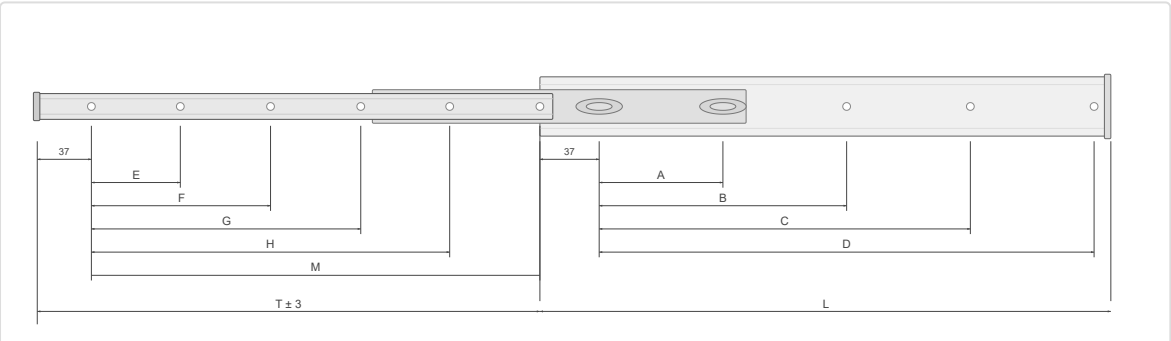

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Code	Length	Travel	1st(D)	1st(C)	A	B	C	D	E	F	G	H	M	Box
DS53501	350	356	37	37	128	96	—	—	329	128	164	—	—	10
DS54001	400	406	37	37	128	96	96	—	379	128	192	—	—	10
DS54501	450	457	37	37	128	96	128	—	429	128	192	—	—	10
DS55001	500	508	37	37	128	96	192	—	479	128	64	160	90	10
DS55506	550	559	37	37	128	96	128	96	529	128	96	192	76	10

TECHNICAL DATA

- Load rating 45kg based on 450mm length — ratings decrease with runner length.
- All dimensions in mm.
- Profile height 46mm, profile width 12.7mm.

ORDERING GUIDE

- Runners sold in pairs (2)
- One pair per drawer
- Drawer width = internal cabinet width - 26mm +/- 2mm

FURTHER INFORMATION

- Full technical datasheet available on request, fixing details, and installation instructions.

Series DS46 Push To Open Soft Close

MEDIUM DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated



The IntAfit Series 46 PSC combines push-to-open convenience with integrated soft-close damping in a medium-duty full-extension drawer runner. The touch-latch mechanism allows handle-free drawer opening — simply push to release, then the soft-close action gently pulls the drawer shut. Featuring a 3-part slide with 100% extension, 45kg load rating and a compact 46mm x 12.7mm profile, the Series 46 PSC is ideal for modern handleless kitchen and furniture designs where clean lines and quiet operation are essential.

Bedroom Furniture	Office Furniture & Desking	Retail Display Units
Domestic Cabinetry	Cashier Drawers	Workshop Storage

KEY FEATURES

✓ Push-to-open touch-latch for handleless designs

✓ Integrated soft-close damping for quiet operation

✓ 100% full extension for complete drawer access

✓ Medium duty 45kg load rating


✓ 3-part slide mechanism for smooth operation

✓ Available in 7 lengths from 300mm to 600mm

✓ Compact 46mm profile height, 12.7mm width

✓ Bright zinc plated for corrosion resistance

✓ Quick release drawer member

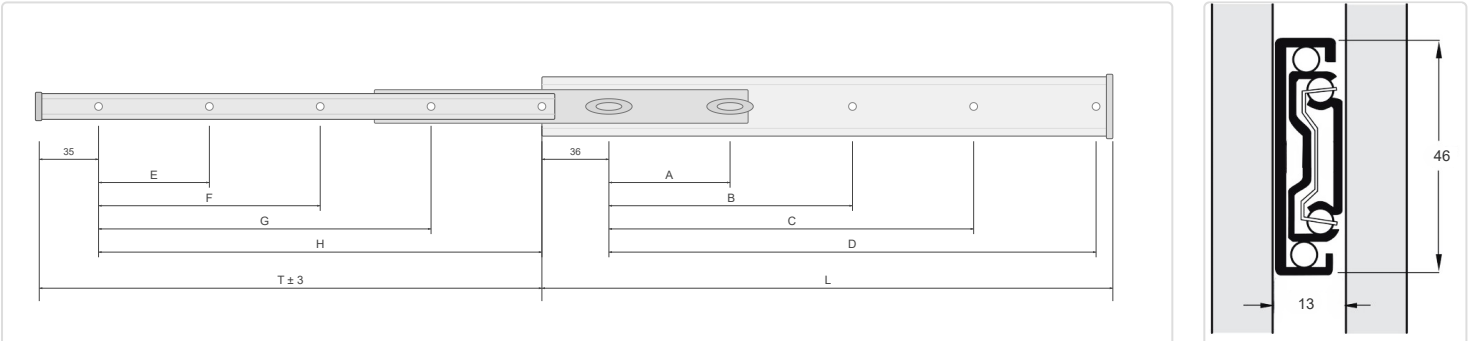

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Code	Length	Travel	1st(D)	1st(C)	A	B	C	D	E	F	G	H	Box
DS5030PSC	300	305	35	36	128	96	—	—	128	114	—	—	10
DS5035PSC	350	356	35	36	128	96	—	—	128	164	—	—	10
DS5040PSC	400	406	35	36	128	96	96	—	128	192	—	—	10
DS5045PSC	450	457	35	36	128	96	128	—	128	192	72	—	10
DS5050PSC	500	508	35	36	128	96	192	—	128	64	160	90	10
DS5055PSC	550	559	35	36	128	96	128	96	128	96	192	76	10
DS5060PSC	600	610	35	36	128	96	128	128	128	96	192	126	10

TECHNICAL DATA

• Load rating 45kg based on 450mm length — ratings decrease with runner length.

• All dimensions in mm.

• First hole for cabinet member 37mm from front edge

ORDERING GUIDE

• Runners sold in pairs (2)

• One pair per drawer

• Drawer width = internal cabinet width - 26mm +/- 2mm

FURTHER INFORMATION

• Full technical datasheet available on request, fixing details, and installation instructions.

Series DS53

HEAVY DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated



The IntAfit Series 53 is a heavy-duty, full-extension ball bearing drawer runner engineered for demanding commercial and industrial applications. Featuring a 3-part slide mechanism with 100% extension, the Series 53 provides complete drawer access across 11 lengths from 350mm to 1200mm. Cold-rolled steel construction with bright zinc plating delivers excellent corrosion resistance and long service life. Load ratings up to 118kg make this runner ideal for tool storage, vehicle conversions, and heavy-duty cabinetry. Quick-release lever disconnect simplifies installation and drawer removal.

* Load ratings decrease with runner length. Runners sold in pairs. Drawer width = internal cabinet width - 38.4mm +/- 2mm.

Vehicle & Campervan Conversions

Industrial Tool Storage

Loft & Eaves Storage

Wardrobe & Closet Systems

Under-Stairs Storage

Commercial Cabinetry

KEY FEATURES

✓ 100% full extension for complete drawer access

✓ Heavy duty 118kg load rating at 450mm length

✓ 3-part slide mechanism for smooth operation

✓ Available in 11 lengths from 350mm to 1200mm


✓ Bright zinc plated for corrosion resistance

✓ Side mounted installation — screw or rivet fixing

✓ Low 53mm profile height minimises drawer clearance

✓ Quick release lever disconnect

✓ Suitable for industrial, commercial and domestic use

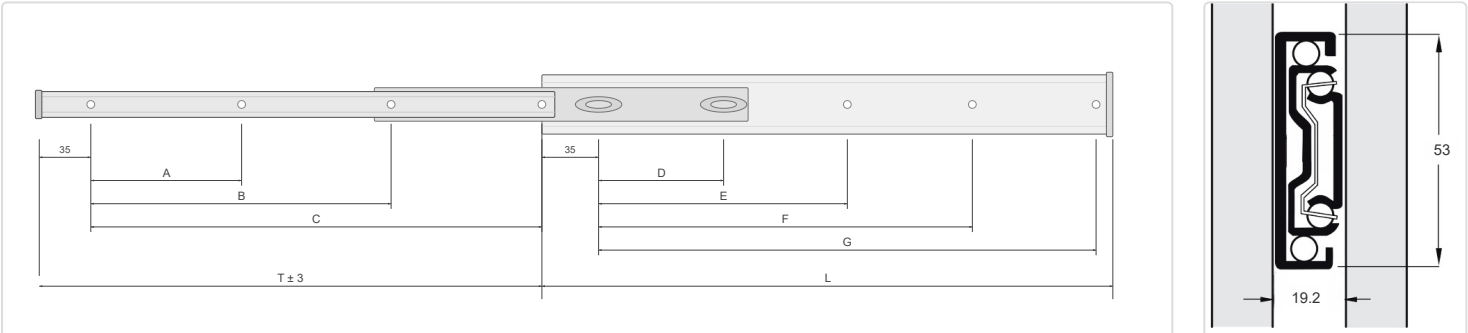

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Code	Length	Load	Defl.	Travel	1st(D)	1st(C)	A	B	C	D	E	F	G
DS53035	350	110	14	350	35	35	256	—	—	224	—	—	—
DS53040	400	115	15	400	35	35	96	288	—	288	—	—	—
DS53045	450	118	15	450	35	35	128	320	—	192	320	—	—
DS53050	500	110	15	500	35	35	160	384	—	224	384	—	—
DS53055	550	100	14	550	35	35	160	416	—	256	416	—	—
DS53060	600	95	15	600	35	35	192	480	—	256	416	480	—
DS53065	650	90	15	650	35	35	224	384	512	192	288	448	512
DS53070	700	85	15	700	35	35	224	416	576	192	320	480	576
DS53075	750	80	16	750	35	35	224	448	608	192	352	512	608
DS53080	800	75	16	800	35	35	224	480	672	192	384	544	672
DS53120	1200	52	19	1200	35	35	224	544	1088	192	480	672	1088

TECHNICAL DATA

- All dimensions in mm.
- Deflection measured under rated load at full extension.
- First hole for cabinet member 37mm from front edge

ORDERING GUIDE

- Runners sold in pairs (2)
- One pair per drawer
- Allow clearance per drawer width formula

FURTHER INFORMATION

- Full technical datasheet available on request including load curves, fixing details, and installation instructions.

Series DS76

HEAVY DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated



The IntAfit Series 76 is a heavy-duty, full-extension ball bearing drawer runner engineered for the most demanding commercial and industrial applications. Featuring a 3-part slide mechanism with 100% extension, the Series 76 provides complete drawer access across 26 lengths from 254mm (10") to 1524mm (60"). Cold-rolled steel construction with bright zinc plating delivers excellent corrosion resistance and long service life. Load ratings up to 227kg make this runner ideal for vehicle conversions, server racks, industrial tool storage, and heavy-duty commercial cabinetry. Quick-release lever disconnect simplifies installation and drawer removal.

* Load ratings decrease with runner length. Runners sold in pairs. Drawer width = internal cabinet width - 38.4mm +/- 2mm.

Vehicle & Campervan Conversions

Industrial Tool Storage

Server Racks & IT Equipment

Commercial Cabinetry

Heavy Duty Storage Solutions

Understairs Storage

KEY FEATURES

✓ 100% full extension for complete drawer access

✓ Heavy duty 227kg load rating at 450mm length

✓ 3-part slide mechanism for smooth operation

✓ Available from 254mm to 1524mm

✓ Bright zinc plated for corrosion resistance


✓ Side mounted installation

✓ Mounting brackets available

✓ 76mm profile height x 19.2mm width

✓ Locking runners also available

✓ This runner does NOT have lever release

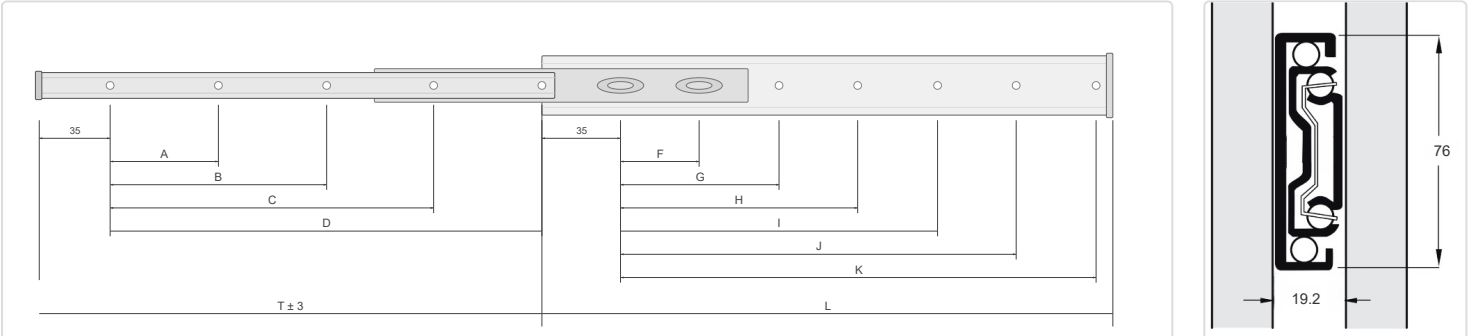

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Code	Length	Load (kg)	Defl.	Travel	1st(D)	1st(C)	A	B	C	D	F	G	H	I	J	K
DS76010	254	180	13	254	35	35	—	—	—	—	—	84	—	—	—	—
DS76012	305	200	14	305	35	35	—	—	—	—	—	134.8	—	—	—	—
DS76014	355	220	15	355	35	35	—	—	—	—	—	185.6	—	—	—	—
DS76016	406	225	15	406	35	35	107.9	—	—	—	—	236.4	—	—	—	285.7
DS76018	457	227	14	457	35	35	107.9	—	—	—	—	287.2	—	—	—	336.5
DS76020	508	200	16	508	35	35	107.9	171.4	—	—	277.8	338	—	—	—	387.3
DS76022	559	186	15	559	35	35	107.9	171.4	—	—	328.6	388.8	—	—	—	438.1
DS76024	610	170	15	610	35	35	107.9	171.4	—	—	379.4	439.6	—	—	—	488.9
DS76026	660	165	14	660	35	35	107.9	171.4	—	—	430.2	490.4	—	—	—	539.7
DS76028	711	160	13	711	35	35	107.9	171.4	—	—	481	541.2	—	—	—	590.5

TECHNICAL DATA

• Load ratings vary depending on runner length

• Deflection measured under full load at full extension

ORDERING GUIDE

• Runners sold in pairs (2)

• One pair per drawer

FURTHER INFORMATION

• Full technical datasheet available on request, fixing details, and installation instructions

Series DS76

HEAVY DUTY DRAWER RUNNER

Available Finish



Bright Zinc Plated

PRODUCT CODES & SPECIFICATIONS (continued)

Code	Length	Load (kg)	Defl.	Travel	1st(D)	1st(C)	A	B	C	D	F	G	H	I	J	K
DS76030	762	156	13	762	35	35	107.9	171.4	349.2	—	531.8	592	215.8	—	482.6	641.3
DS76032	813	150	14	813	35	35	107.9	171.4	349.2	—	582.6	642.8	215.8	374.6	533.4	692.1
DS76034	864	146	15	864	35	35	107.9	171.4	349.2	450.8	633.4	693.6	215.8	400	584.2	742.9
DS76036	914	140	15	914	35	35	107.9	171.4	349.2	450.8	684.2	744.4	215.8	425.4	635	793.7
DS76038	965	135	15	965	35	35	107.9	171.4	349.2	450.8	735	795.2	215.8	450.8	685.8	844.5
DS76040	1016	130	15	1016	35	35	107.9	171.4	349.2	450.8	785.8	846	215.8	476.2	736.6	895.3
DS76042	1067	126	15	1067	35	35	107.9	171.4	349.2	450.8	836.6	896.8	215.8	501.6	787.4	946.1
DS76044	1118	120	15	1118	35	35	107.9	171.4	349.2	450.8	887.4	947.6	215.8	527	838.2	996.9
DS76046	1169	115	15	1169	35	35	107.9	171.4	349.2	450.8	938.2	998.4	215.8	552.4	889	1047.7
DS76048	1219	110	15	1219	35	35	107.9	171.4	349.2	450.8	989	1049.2	215.8	577.8	939.8	1098.5
DS76050	1270	108	15	1270	35	35	107.9	171.4	349.2	450.8	1039.8	1100	215.8	603.2	990.6	1149.3
DS76052	1321	100	15	1321	35	35	107.9	171.4	349.2	450.8	1090.6	1150.8	215.8	628.6	1041.4	1200.1
DS76054	1372	95	15	1372	35	35	107.9	171.4	349.2	450.8	1141.4	1201.6	215.8	654	1092.2	1250.9
DS76056	1422	95	15	1422	35	35	107.9	171.4	349.2	450.8	1192.2	1252.4	215.8	679.4	1143	1301.7
DS76058	1473	92	15	1473	35	35	107.9	171.4	349.2	450.8	1243	1303.2	215.8	704.8	1193.8	1352.5
DS76060	1524	92	15	1524	35	35	107.9	171.4	349.2	450.8	1293.8	1354	215.8	730.2	1244.6	1403.3

TECHNICAL DATA

- Load ratings vary depending on runner length
- Deflection measured under full load at full extension

ORDERING GUIDE

- Runners sold in pairs (2)
- One pair per drawer

FURTHER INFORMATION

- Full technical datasheet available on request, fixing details, and installation instructions

Series DS76 Locking Runner

HEAVY DUTY LOCKING DRAWER RUNNER

Available Finish



Bright Zinc Plated



The IntAfit Series 76 is a heavy-duty, full-extension lock in and out ball bearing drawer runner engineered for the most demanding commercial and industrial applications. Featuring a 3-part slide mechanism with 100% extension, the Series 76 provides complete drawer access across 26 lengths from 254mm (10") to 1524mm (60"). Cold-rolled steel construction with bright zinc plating delivers excellent corrosion resistance and long service life. Load ratings up to 227kg make this runner ideal for vehicle conversions, server racks, industrial tool storage, and heavy-duty commercial cabinetry. Quick-release lever disconnect simplifies installation and drawer removal.

** Load ratings decrease with runner length. Runners sold in pairs. Drawer width = internal cabinet width - 38.4mm +/- 2mm.*

Vehicle & Campervan Conversions

Industrial Tool Storage

Server Racks & IT Equipment

Commercial Cabinetry

Heavy Duty Storage Solutions

Understairs Storage

KEY FEATURES

✓ Lock in / Lock out runner

✓ 100% full extension for complete drawer access

✓ Heavy duty 227kg load rating at 450mm length

✓ 3-part slide mechanism for smooth operation


✓ Available from 254mm to 1524mm

✓ Bright zinc plated for corrosion resistance

✓ Side mounted installation

✓ Mounting brackets available

✓ 76mm profile height x 19.2mm width

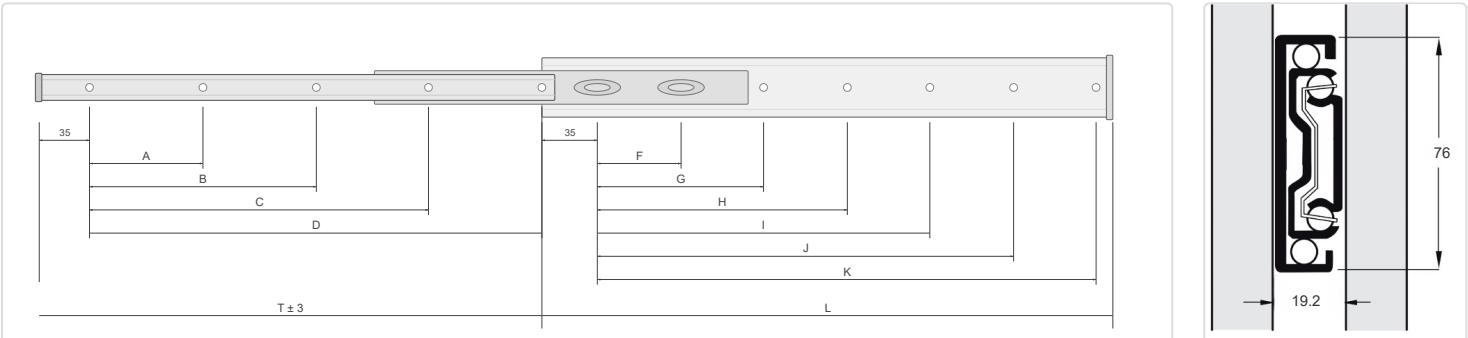

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Code	Length	Load (kg)	Defl.	Travel	1st(D)	1st(C)	A	B	C	D	F	G	H	I	J	K
DS76014LK2	355	220	15	355	35	35	—	—	—	—	—	185.6	—	—	—	—
DS76016LK2	406	225	15	406	35	35	107.9	—	—	—	—	236.4	—	—	—	285.7
DS76018LK2	457	227	14	457	35	35	107.9	—	—	—	—	287.2	—	—	—	336.5
DS76020LK2	508	200	16	508	35	35	107.9	171.4	—	—	277.8	338	—	—	—	387.3
DS76022LK2	559	186	15	559	35	35	107.9	171.4	—	—	328.6	388.8	—	—	—	438.1
DS76024LK2	610	170	15	610	35	35	107.9	171.4	—	—	379.4	439.6	—	—	—	488.9
DS76026LK2	660	165	14	660	35	35	107.9	171.4	—	—	430.2	490.4	—	—	—	539.7
DS76028LK2	711	160	13	711	35	35	107.9	171.4	—	—	481	541.2	—	—	—	590.5
DS76030LK2	762	156	13	762	35	35	107.9	171.4	349.2	—	531.8	592	215.8	—	482.6	641.3
DS76032LK2	813	150	14	813	35	35	107.9	171.4	349.2	—	582.6	642.8	215.8	374.6	533.4	692.1

TECHNICAL DATA

• Load ratings vary depending on runner length.

• Deflection measured under full load at full extension.

ORDERING GUIDE

• Runners sold in pairs (2)

• One pair per drawer

FURTHER INFORMATION

• Full technical datasheet available on request, fixing details, and installation guide

Series DS76 Locking Runner

HEAVY DUTY LOCKING DRAWER RUNNER

Available Finish

Bright Zinc Plated

PRODUCT CODES & SPECIFICATIONS (continued)

Code	Length	Load (kg)	Defl.	Travel	1st(D)	1st(C)	A	B	C	D	F	G	H	I	J	K
DS76034LK2	864	146	15	864	35	35	107.9	171.4	349.2	450.8	633.4	693.6	215.8	400	584.2	742.9
DS76036LK2	914	140	15	914	35	35	107.9	171.4	349.2	450.8	684.2	744.4	215.8	425.4	635	793.7
DS76038LK2	965	135	15	965	35	35	107.9	171.4	349.2	450.8	735	795.2	215.8	450.8	685.8	844.5
DS76040LK2	1016	130	15	1016	35	35	107.9	171.4	349.2	450.8	785.8	846	215.8	476.2	736.6	895.3
DS76042LK2	1067	126	15	1067	35	35	107.9	171.4	349.2	450.8	836.6	896.8	215.8	501.6	787.4	946.1
DS76044LK2	1118	120	15	1118	35	35	107.9	171.4	349.2	450.8	887.4	947.6	215.8	527	838.2	996.9
DS76046LK2	1169	115	15	1169	35	35	107.9	171.4	349.2	450.8	938.2	998.4	215.8	552.4	889	1047.7
DS76048LK2	1219	110	15	1219	35	35	107.9	171.4	349.2	450.8	989	1049.2	215.8	577.8	939.8	1098.5
DS76050LK2	1270	108	15	1270	35	35	107.9	171.4	349.2	450.8	1039.8	1100	215.8	603.2	990.6	1149.3
DS76052LK2	1321	100	15	1321	35	35	107.9	171.4	349.2	450.8	1090.6	1150.8	215.8	628.6	1041.4	1200.1
DS76054LK2	1372	95	15	1372	35	35	107.9	171.4	349.2	450.8	1141.4	1201.6	215.8	654	1092.2	1250.9
DS76056LK2	1422	95	15	1422	35	35	107.9	171.4	349.2	450.8	1192.2	1252.4	215.8	679.4	1143	1301.7
DS76058LK2	1473	92	15	1473	35	35	107.9	171.4	349.2	450.8	1243	1303.2	215.8	704.8	1193.8	1352.5
DS76060LK2	1524	92	15	1524	35	35	107.9	171.4	349.2	450.8	1293.8	1354	215.8	730.2	1244.6	1403.3

TECHNICAL DATA

- Load ratings vary depending on runner length.
- Deflection measured under full load at full extension.

ORDERING GUIDE

- Runners sold in pairs (2)
- One pair per drawer


FURTHER INFORMATION

- Full technical datasheet available on request, fixing details, and installation guide

DS76 Mounting Brackets

MOUNTING BRACKETS FOR SERIES DS76 RUNNERS

Available Finish
Zinc Plated

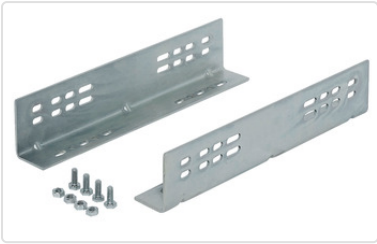

For applications where side panels aren't required, our 3mm plated steel L-shaped mounting brackets provide a robust and cost-effective alternative fixing method. Designed for easy assembly, each bracket comes with a complete fittings pack, allowing for quick installation without additional components.


Four configurable lengths to suit your application: 305mm, 406mm, 558mm, and 711mm

Pre-drilled holes precisely aligned with Series DS76 heavy-duty runner (container slide) fixing positions


Flexible configuration – multiple brackets can be combined to match longer runner lengths - see guide below

Corrosion-resistant plating for durability in demanding environments

SIDE MOUNT OPTIONS

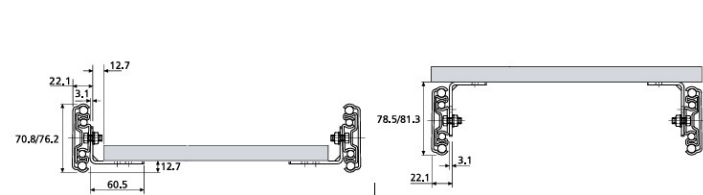

BASE MOUNT OPTIONS

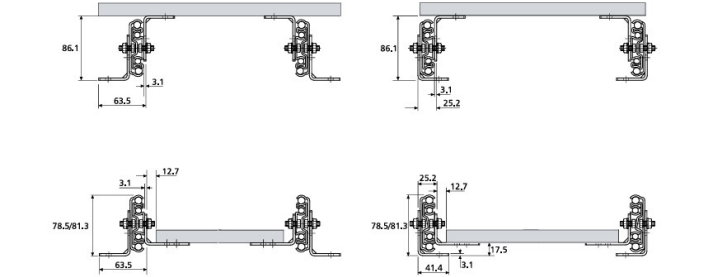

NUMBER OF BRACKETS REQUIRED PER RUNNER FOR SIDE OR BASE FIXING APPLICATION

Bracket	DS90305		DS90406		DS90559		DS90711	
	Side	Base	Side	Base	Side	Base	Side	Base
DS76012 / LK	1	2	—	—	—	—	—	—
DS76014 / LK	1	2	—	—	—	—	—	—
DS76016 / LK	—	—	1	2	—	—	—	—
DS76018 / LK	—	—	1	2	—	—	—	—
DS76020 / LK	—	—	1	2	—	—	—	—
DS76022 / LK	—	—	—	—	1	2	—	—
DS76024 / LK	—	—	—	—	1	2	—	—
DS76026 / LK	—	—	—	—	1	2	—	—
DS76028 / LK	—	—	—	—	—	—	1	2
DS76030 / LK	—	—	—	—	—	—	1	2
DS76032 / LK	—	—	—	—	—	—	1	2
DS76034 / LK	2	4	—	—	—	—	—	—
DS76036 / LK	2	4	—	—	—	—	—	—
DS76038 / LK	2	4	—	—	—	—	—	—
DS76040 / LK	1	2	—	—	1	2	—	—
DS76042 / LK	1	2	—	—	—	1	1	1
DS76044 / LK	1	2	—	—	—	2	1	—
DS76046 / LK	1	2	—	—	—	2	1	—
DS76048 / LK	1	2	—	—	—	—	1	2
DS76050 / LK	—	—	—	—	2	—	—	—
DS76052 / LK	—	—	—	—	2	—	—	—
DS76054 / LK	—	—	—	1	2	3	—	—
DS76056 / LK	—	—	—	1	2	3	2	—
DS76058 / LK	—	—	—	1	2	3	2	—
DS76060 / LK	—	—	—	—	1	3	1	1

TECHNICAL DATA

- Suits runner lengths from 304mm to 1524mm
- Works with both DS76 Locking and Non-Locking runners

ORDERING GUIDE

- Check configuration guide above for bracket size and quantity required per runner
- Guide is number of brackets pr side (NOT per pair)

FURTHER INFORMATION

- Full technical datasheet available on request, fixing details, and installation instructions

Series DS80

SLIM DRAWER SIDES

Available Finish
● Grey



The IntAfit Series DS80 Slim Drawer Side system provides a clean, modern drawer solution with full extension and integrated soft-close. Available in four drawer side heights (89mm, 121mm, 152mm and 185mm) and seven lengths from 250mm to 550mm, the DS80 offers maximum flexibility for kitchen, bedroom and bathroom furniture applications. All variants are rated to 30kg load capacity and sold as complete pairs.

** All drawer sides sold in pairs. Load rating 30kg per pair across all sizes.*

Kitchen Drawer Systems	Bedroom & Wardrobe Furniture	Bathroom Vanity Units
Commercial Cabinetry	Slim Drawer Side Assemblies	Premium Furniture Manufacturing

KEY FEATURES

✓ Four drawer side heights: 89mm, 121mm, 152mm, 185mm

✓ Full extension with integrated soft-close

✓ 30kg load capacity across all sizes

✓ Seven lengths from 250mm to 550mm

✓ Grey finish as standard

✓ Sold as complete pairs

✓ Slim profile for maximum internal drawer space

✓ Compatible with DS86 concealed runner system

Cabinet edge

Standard drawer

LT=NL+13

37

37

Back

153

120

92

57

16

B

LW-49

Type	89	121	152	185
H (mm)	57	92	120	153

Drawer Bottom

L=NL-8

A

LW-25

KB Cabinet width

LW Internal cabinet width

NL Nominal length

A

B

LW

KB

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Height \ Length	250	300	350	400	450	500	550
H89	DS808925SB-G	DS808930SB-G	DS808935SB-G	DS808940SB-G	DS808945SB-G	DS808950SB-G	DS808955SB-G
H121	DS812125SB-G	DS812130SB-G	DS812135SB-G	DS812140SB-G	DS812145SB-G	DS812150SB-G	DS812155SB-G
H152	DS815225SB-G	DS815230SB-G	DS815235SB-G	DS815240SB-G	DS815245SB-G	DS815250SB-G	DS815255SB-G
H185	DS818525SB-G	DS818530SB-G	DS818535SB-G	DS818540SB-G	DS818545SB-G	DS818550SB-G	DS818555SB-G

CONCEALED RUNNERS

Type \ Length	250	300	350	400	450	500	550
Soft Close	DS86311B-250	DS86311B-300	DS86311B-350	DS86311B-400	DS86311B-450	DS86311B-500	—
Push Open	—	—	DS86312B-350	—	—	—	—

TECHNICAL DATA

• All dimensions in mm. Load capacity 30kg per pair across all heights and lengths. Full extension with integrated soft-close mechanism.

ORDERING GUIDE

• Drawer sides sold in pairs (2)

• One pair per drawer

• Select height then length to find product code

FURTHER INFORMATION

• Full technical datasheet available on request including installation instructions, drawer side compatibility, and front panel adjustment details.

Series DS86

CONCEALED DRAWER RUNNERS

Available Finish



Bright Zinc Plated



The IntAfit Series DS86 is a full-extension concealed drawer runner with integrated soft-close damping, designed for slim drawer side systems. The undermount design hides completely beneath the drawer base for a clean, modern aesthetic with no visible hardware. Featuring smooth ball bearing operation and soft-close action as standard, the DS86 is available in 6 lengths from 250mm to 500mm. Ideal for kitchen, bedroom and bathroom furniture where a sleek, minimalist drawer appearance is required.

* NL = Nominal Length. DL = Runner Length (runner length including soft-close mechanism). KL = Min Depth (minimum cabinet depth required). PL = Pull Out Length (usable drawer travel). Runners sold in pairs.

Kitchen Cabinets	Bedroom & Wardrobe Furniture	Bathroom Vanity Units
Office Furniture	Deluxe & Cospla Drawer Systems	Internal Drawers

KEY FEATURES

✓ Concealed undermount design — no visible hardware

✓ Full extension with integrated soft-close damping

✓ Max drawer side thickness 16mm

✓ Smooth ball bearing operation

✓ Available in 6 lengths from 250mm to 500mm


✓ Galvanised steel for corrosion resistance

✓ Quick release 1D handles

✓ Vertical adjustment 3mm

✓ SGS test certification

✓ Works with Deluxe, Cospla and wooden drawer sides

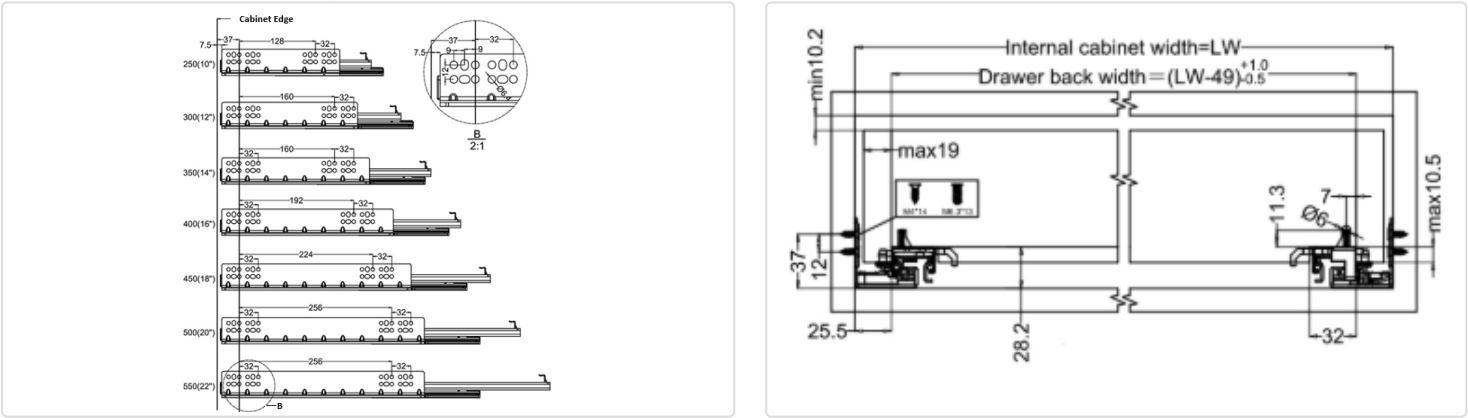

PRODUCT CODES & SPECIFICATIONS (All measurements in mm)

Code	NL	DL	KL	PL
DS86311B-250	250	253	263	234
DS86311B-300	300	303	313	284
DS86311B-350	350	353	363	324
DS86311B-400	400	403	413	384
DS86311B-450	450	453	463	434
DS86311B-500	500	503	513	484

TECHNICAL DATA

• All dimensions in mm. KT (total depth) = NL + 13mm. Concealed undermount installation beneath drawer base.

ORDERING GUIDE

• Runners sold in pairs (2)

• One pair per drawer

• Ensure minimum cabinet depth (KL) is met

FURTHER INFORMATION

• Full technical datasheet available on request including installation instructions, drawer side compatibility, and front panel adjustment details.



CONTACT US

**Eurofit Systems, Barmston Road
Beverley HU17 0LA**

www.eurofitsystems.com
sales@eurofitsystems.com
+44 1482 714488